



MARKS MENU.




This menu is used to add marks, measurements and comments to main window and has following options:

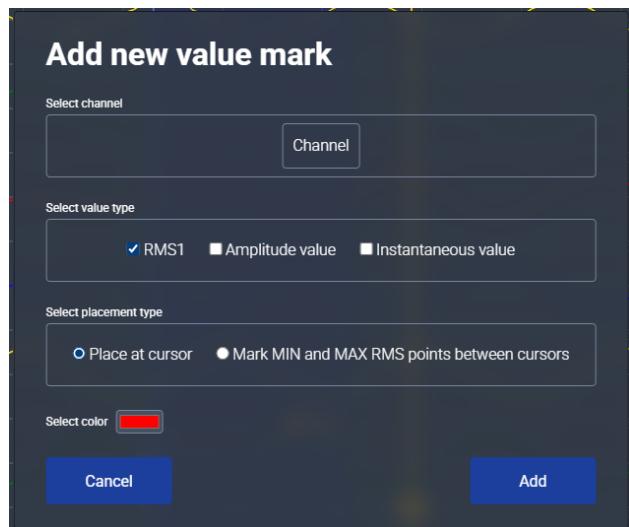

Option **Value mark** is used to add measured value to the analog channel. Firstly, you have to choose a channel for marking, then select value and placement type. By default, red color is used but it is changeable.

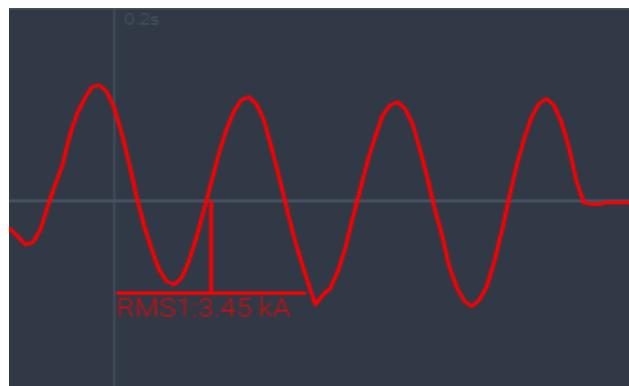


Analog channel with placed mark which contains the first harmonic RMS value. If not any channel selected the mark will be added to the first channel.

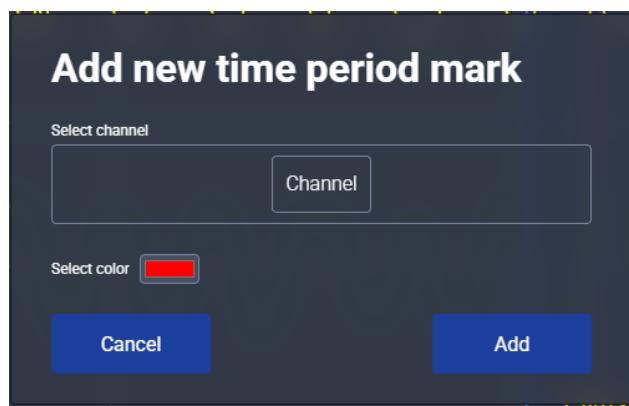

Option **Time period mark** is used to add measured time between cursors (depends on the settings it can be milliseconds, degrees, or cycles).

Time mark in milliseconds.


Comtrade → Marks → Digital channel overprint

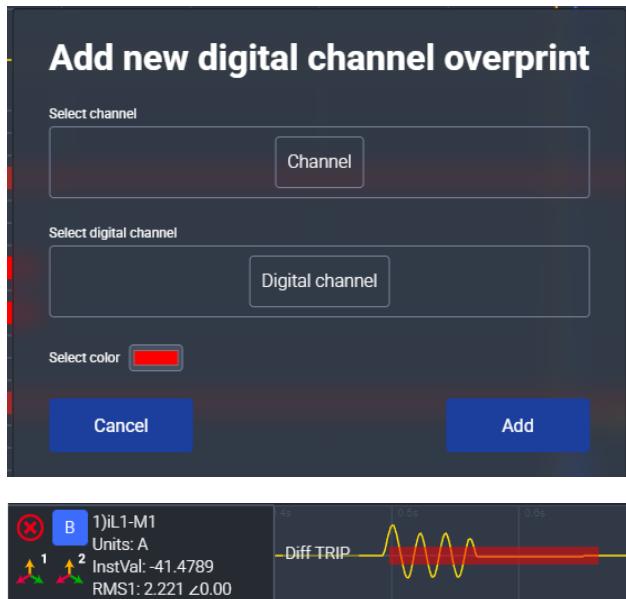

Option **Digital channel overprint** prints selected digital channel on selected analog channel.

Analog channel with added trip signal.

Comtrade → Marks → Text comment

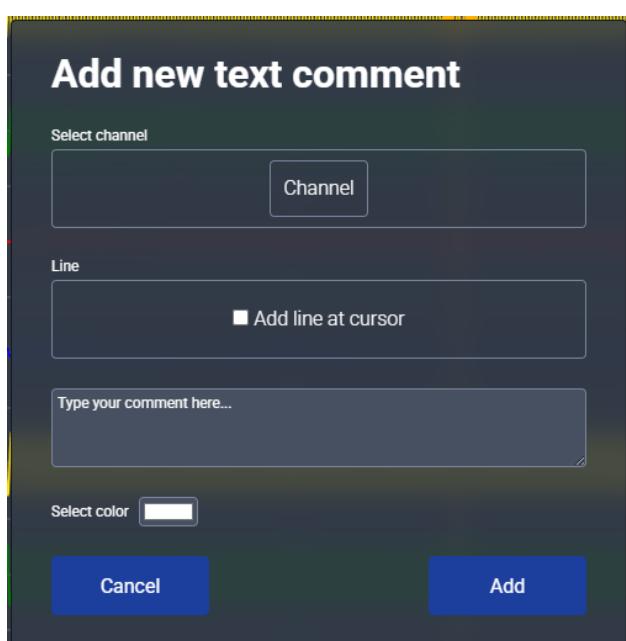

Option **Text comment** prints inserted text on selected analog channel. Also you can add a dash line at the beginning of the comment which goes through all channels.

Text comments with added dash lines.



Comtrade → Marks → Digital channel overprint

Option Clear marks for channel removes all added marks and comments for selected channel.